

(19)



JAPANESE PATENT OFFICE

PATENT ABSTRACTS OF JAPAN

(11) Publication number: **04117684 A**

(43) Date of publication of application: 17 . 04 . 92

(51) Int. Cl

**G11B 23/087**

(21) Application number: 02237319

(22) Date of filing: 07 . 09 . 90

(71) Applicant: **SONY CORP**


(72) Inventor: **SATO MASANORI**

(54) **CARTRIDGE FOR RECORDING AND REPRODUCING**

(57) Abstract:

**PURPOSE:** To prevent a snap fastener from being suddenly detached from an engaging hole by specifying a bending direction for engaging and detaching each snap fastener to an from each engaging hole.

**CONSTITUTION:** The bending direction for engaging and detaching each snap fastener 15 to and from each engaging hole 17 is set in a direction inclined mutually to two rectangular sides at the respective corners of upper and lower halves 3 and 2. Therefore, even when component force parallel to one of the two rectangular sides at each corner of the upper half 3 is operated upon the upper half 3 as the component force of external force to separate the upper half 3 from the lower half 2, each snap fastener 15 is hardly bent since the bending direction of each snap fastener 15 is inclined to the component force. Thus, each snap fastener 15 is hardly detached from the engaging hole 17.

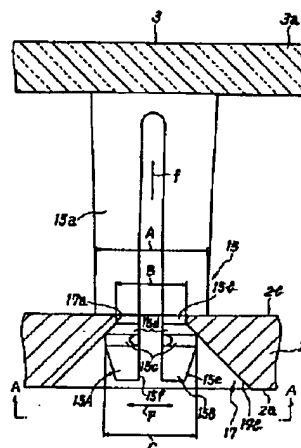

COPYRIGHT: (C)1992,JPO&Japio

# PATENT ABSTRACTS OF JAPAN

(11)Publication number : 04-117684

(43)Date of publication of application : 17.04.1992

(51)Int.Cl.

G11B 23/087

(21)Application number : 02-237319

(71)Applicant : SONY CORP

(22)Date of filing : 07.09.1990


(72)Inventor : SATO MASANORI

## (54) CARTRIDGE FOR RECORDING AND REPRODUCING

### (57)Abstract:

**PURPOSE:** To prevent a snap fastener from being suddenly detached from an engaging hole by specifying a bending direction for engaging and detaching each snap fastener to an from each engaging hole.

**CONSTITUTION:** The bending direction for engaging and detaching each snap fastener 15 to and from each engaging hole 17 is set in a direction inclined mutually to two rectangular sides at the respective corners of upper and lower halves 3 and 2. Therefore, even when component force parallel to one of the two rectangular sides at each corner of the upper half 3 is operated upon the upper half 3 as the component force of external force to separate the upper half 3 from the lower half 2, each snap fastener 15 is hardly bent since the bending direction of each snap fastener 15 is inclined to the component force. Thus, each snap fastener 15 is hardly detached from the engaging hole 17.

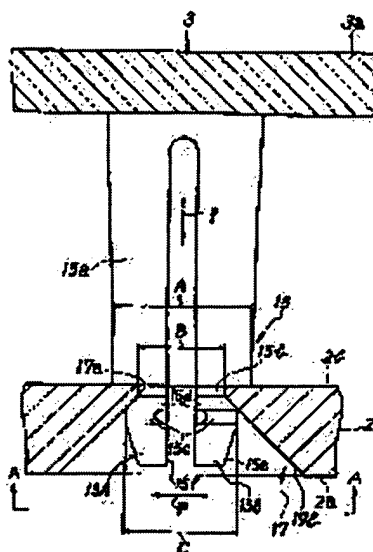

## LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than

the examiner's decision of rejection or  
application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's  
decision of rejection]

[Date of requesting appeal against examiner's  
decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2000 Japan Patent Office